

**Xtreme**  
in innovation

**primus**

*laundry equipment*

## TUMBLE DRYERS

**DX55, DX77, DX90**



### FEATURES

- Full OPL microprocessor
- Gas, Steam heating ,  
Electrical heating (DX55)
- Large door opening  
for easy loading  
and unloading (Ø68cm)
- Galvanized drum
- Radial airflow
- Standard reversing drum
- Self-cleaning lint screen
- Preheating of intake air

### OPTIONS

- Stainless steel drum
- Stainless steel front panel
- Residual moisture control Sensodry+®:  
- lower energy and utility costs  
- lower linen replacement costs
- SafeTech™ Fire Suppression System



LOW ENERGY  
CONSUMPTION



LARGE DOOR  
OPENING




FAST DRYING  
CYCLES

**senso.dry+**

**SafeTech™**

| TYPE            |       | DX 55 EL  | DX 55 GAS | DX 55 STEAM<br>(HIGH PRESSURE) | DX 77 GAS         | DX 77 STEAM<br>(HIGH PRESSURE) | DX 90 GAS         | DX 90 STEAM<br>(HIGH PRESSURE) |
|-----------------|-------|---|-----------|--------------------------------|-------------------|--------------------------------|-------------------|--------------------------------|
| CAPACITY        | kg    | 55  |           |                                | 77                |                                | 90                |                                |
| DIMENSIONS DRUM |       |   |           |                                |                   |                                |                   |                                |
| Drum volume     | l     | 1021  |           |                                | 1408              |                                | 1656              |                                |
| Drum diameter   | mm    | Ø1118   |           |                                | Ø1289             |                                | Ø1289             |                                |
| AIR FLOW        | l/s   | 755   |           |                                | 1156              |                                | 1156              |                                |
| HEATING         | kW    | 60  | 79        | 119                            | 116               | 190                            | 125               | 190                            |
| MOTOR           |       |   |           |                                |                   |                                |                   |                                |
| Drum            | kW    | 0.560   |           |                                | 0.560             |                                | 0.560             |                                |
| Fan             | kW    | 0.746   |           |                                | 2.238             |                                | 2.238             |                                |
| CONNECTION      |       |   |           |                                |                   |                                |                   |                                |
| Electrical      | AC/Hz | 3x200-240V 50/60Hz, 3x380-415V 50 Hz, 3x380-415/440V 60Hz |           |                                | Others on request |                                | Others on request |                                |
| Gas inlet       | inch  | -   | 1         | -                              | 1                 | -                              | 1                 | -                              |
| Steam inlet     | inch  | -   | -         | 3/4                            | -                 | 3/4                            | -                 | 3/4                            |
| Air outlet      | mm    | 254   |           |                                | 305               |                                | 305               |                                |
|                 | inch  | 10  |           |                                | 12                |                                | 12                |                                |
| DIMENSIONS      |       |   |           |                                |                   |                                |                   |                                |
| HxWxD unpacked  | mm    | 2177x1178x1725  |           |                                | 2388x1349x1749    |                                | 2388x1349x1939    |                                |
| HxWxD packed    | mm    | 2286x1232x1829  |           |                                | 2519x1473x1892    |                                | 2515x1413x2019    |                                |
| WEIGHT          |       |   |           |                                |                   |                                |                   |                                |
| Net             | kg    | 578   | 578       | 624                            | 714               | 760                            | 790               | 820                            |
| Gross           | kg    | 607   | 607       | 656                            | 756               | 806                            | 855               | 855                            |

The data concerning dimensions of machines include all extended parts

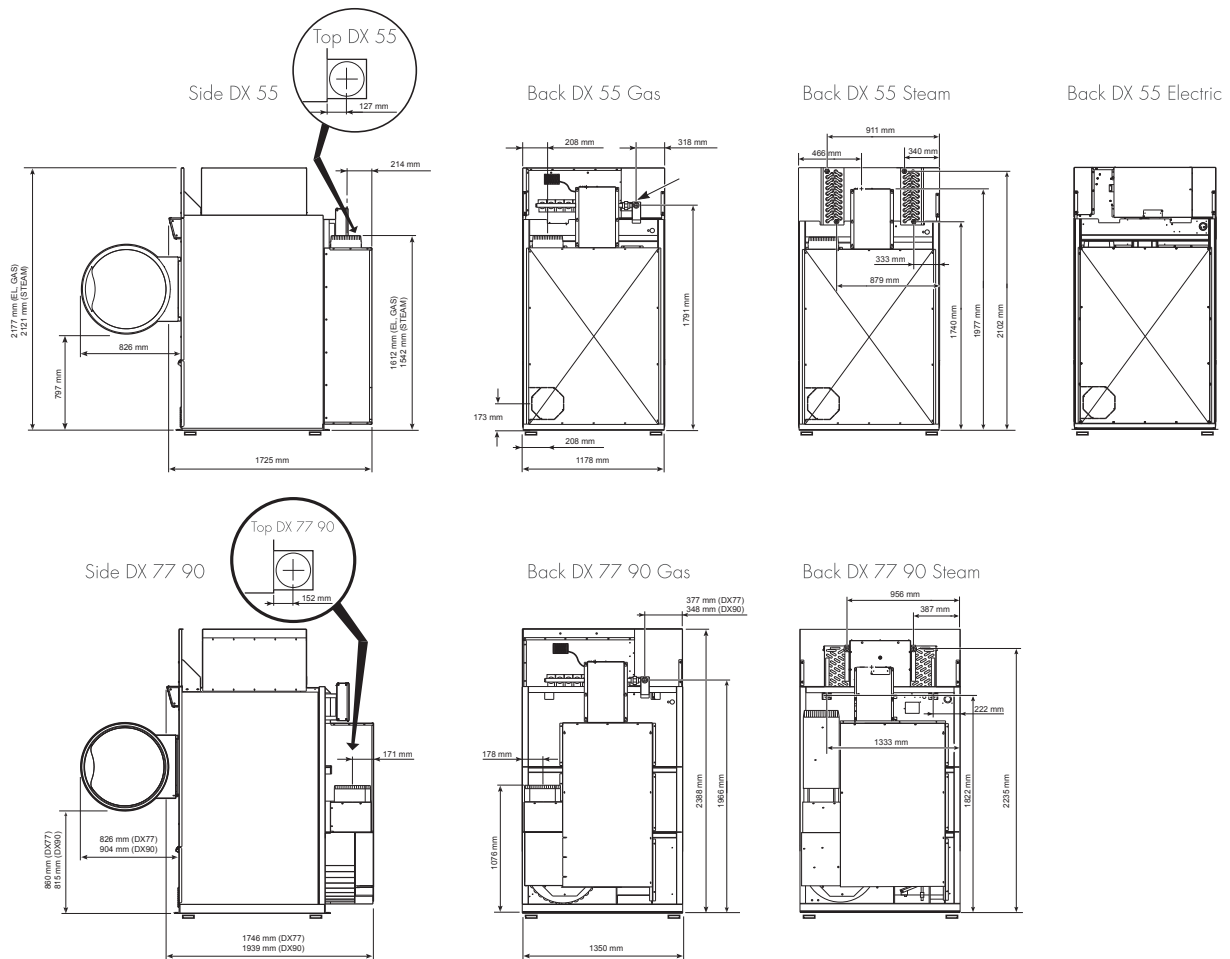

Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

