

# primus

laundry equipment

**Xtreme**  
in innovation

## Industrial Tumble Dryers

T9 HP, T11 HP, T13 HP, T16 HP



### FEATURES

- Heat pump
- Standard stainless steel drum with large diameter
- Easy-to-use microprocessor (ECT)
- Combination of Radial and Axial airflow - RADAX® concept:
  - maximal heat transfer
  - low energy consumption
  - short drying time
- Large door opening for easy loading and unloading
- Self cleaning lint screen

### OPTIONS

- Coin operated version
- Reversing drum
- Full Control programmer (FCT)
- Residual moisture control Sensodry®:
  - safe drying of delicate linen
  - humidity detection in %
  - ideal in combination with SoftWash®
  - ideal for dry cleaners, fire depts
  - available on Easy and Full Control
- Stainless steel front



HEAT PUMP



STANDARD STAINLESS  
STEEL DRUM




ENERGY EFFICIENT

 **senso.dry**

 **radax**

TYPE		T9 HP	T 11 HP	T 13 HP	T 16 HP
CAPACITY					
Drum capacity	kg/lb	9/20	11/24	13/27	16/35
Drum volume	l	195	250	285	345
Drum diameter	mm	Ø760	Ø760	Ø760	Ø760
DRYING AVERAGE	g/min	122	126	120	120
MOTORS					
Fan	kW	0,20	0,20	0,20	0,20
Drive	kW	0,25	0,25	0,25	0,25
ELECTRICAL HEATING					
Electrical connection		3x380-415V 50Hz +N			
Energy	kW	2,9	2,9	2,9	2,9
PROGRAMMER					
Easy control - antivandal		Standard	Standard	Standard	Standard
Full control		Available	Available	Available	Available
DIMENSIONS					
Size HxWxD	mm	1465x795x1275	1680x795x1525	1680x795x1615	1680x795x1735
TRANSPORT DATA					
Gross weight	kg	295	355	380	385
Net weight	kg	260	320	340	340

### Energy consumption comparison

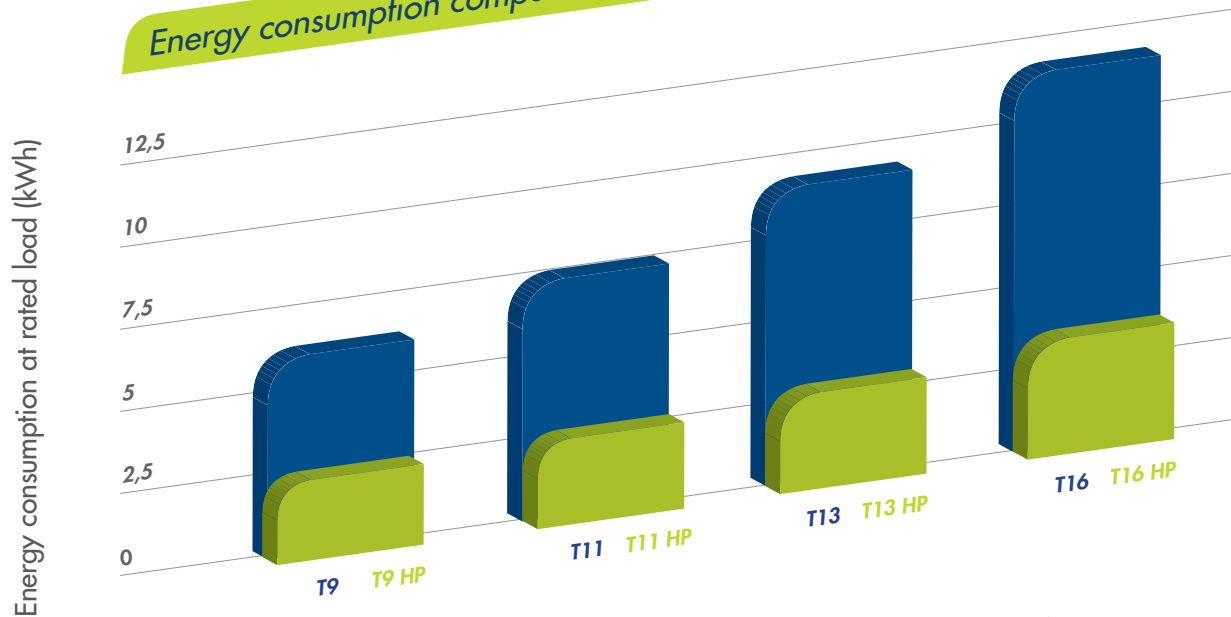

The company Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

ISO 9001  
ISO 14001  
BUREAU VERITAS  
Certification

